
MOBUS FABRICS

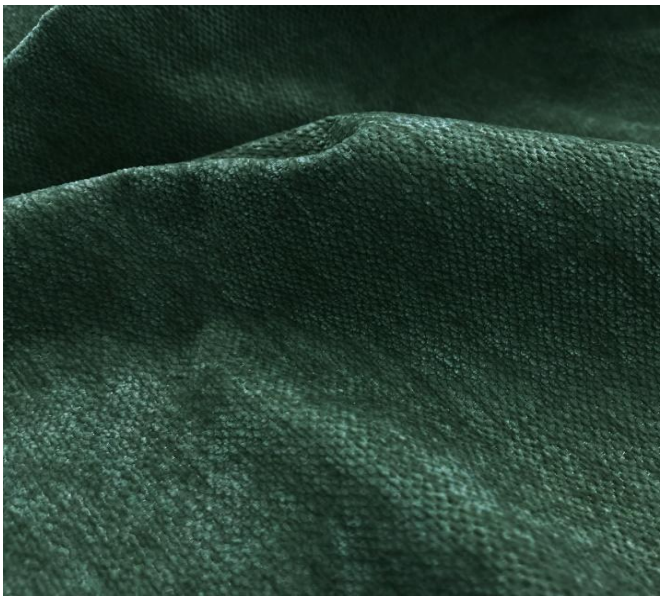

TECHNICAL SPECIFICATION SHEET

Range	**Seoul DWR**			
Design	Flat Woven, Chenille			
Composition ±3% per Compound	100% Polyester			
Useable Fabric Width (cm)	138			
Martindale (rubs)	> 50,000			
Seam (mm)	Warp	< 3mm	Weft	< 3mm
Tensile (N)	Warp	≥ 1100N	Weft	≥ 600N
Tear (N)	Warp	≥ 90N	Weft	≥ 80 N
Pilling Grade	@2000 rubs	4-5	@5000 rubs	4-5
Bursting (kPa)	n/a			
Weight (gsm) ±5%	320			
FR Weight (gsm) ±5%	UK	380	SIAN	380
Care Instructions	Spot clean in situ			
				

www.mobus.co.uk